






ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/05/28	JIM.KING

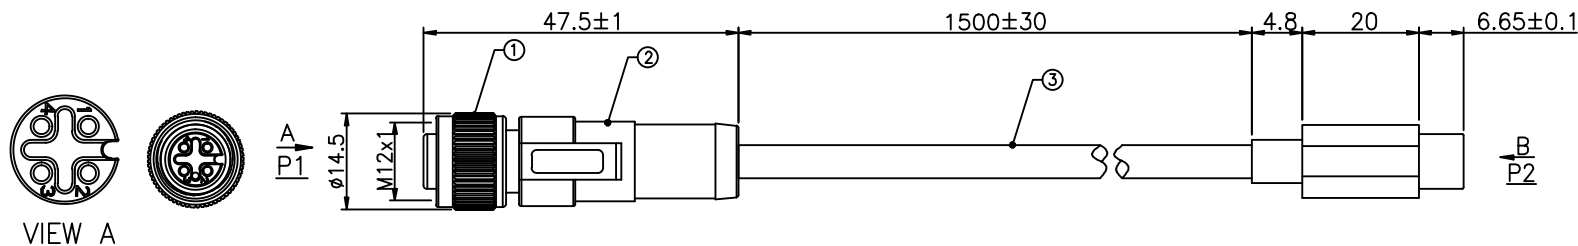

Wire Diagram 接线定义		
P1	Wire Color 线的颜色	P2
1	Red 红	A4, A9 B4, B9
2	White 白	A7
3	Green 绿	A6
/	/	A5
4	Black 黑	A1, A12 B1, B12
Shell 外壳	Braid Shield 编织屏蔽	Shell 外壳



端子带  
5.1K电阻

3	Connector	TYPE-C Male connector with cable,UL2725 28AWG*1P+24AWG*2C+ADB,Black PVC Jacket,ID4.5	1
2	Overmold	PVC ,BLACK	1
1	Connector	M12 A-CODE 4P female	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED  UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	<b>RENHOTEC GROUP</b>	
	PART DESCRIPTION: M12 A-code 4P Female TO USB Type c male	
Appr: JIM.KING	P/N: RHT-605-7420	
Check:	Date: 2024.05.28	Scale: Free
Draw: DING	Unit: MM	Type: Z
	Page: 1/1	